



Airwell⁺7

Tunable Diode Laser Absorption Spectroscopy

Gas Analyzers

CH₄ NH₃ HCL

Non-Dispersive Infrared

Gas Analyzers

SF₆ N₂O CO CO₂ Refrigerant

SO₂ NO C₂H₂ C₂H₄ C₃H₈



CE Approved
2014 Golden Gas Award
Green Certificate




KINSCO Technology Co.,Ltd

Made in the Korea

What is Tunable Diode Laser Absorption Spectroscopy ?


A laser diode is a laser whose active medium is a semiconductor similar to that found in a light-emitting diode. A tunable laser is a laser whose wavelength of operation can be altered in a controlled manner. Tunable diode laser absorption spectroscopy (TDLAS) is a technique for measuring the concentration of certain species such as CH₄, NH₃ and HCL in a gaseous mixture using tunable diode lasers and laser absorption spectrometry. The advantage of TDLAS over other techniques for concentration measurement is to achieve very low detection limits.

Airwell+7 built in the proprietary technology-enhanced TDLS gas detection unit where a 0.1 nm narrow bandwidth diode laser beam is scanned across an absorption band of the target gas, performing a high-resolution near-infrared absorption measurement



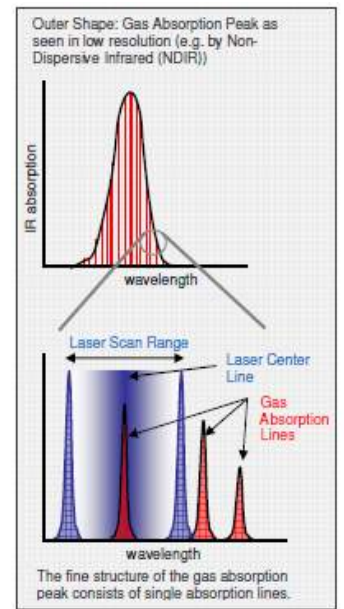


What is the main Advantage ?

- Long calibration cycles
- Easy to operate
- Low maintenance
- Low cost
- Highly selective to target gas, no cross-sensitivity with Moisture & other gases
- No direct contact with gas, no degradation or poisoning
- No need for reference channel
- Intrinsically functionally safe (sensor status monitored permanently)
- High dynamic range (up to 5*10³)
- Stable & accurate, practically no Zero - drift
- Long life-time (min. 5 years)
- No consumables
- Fast response - from milliseconds to seconds depending on the required detection limit
- Potential for low power consumption
- Fast recovery

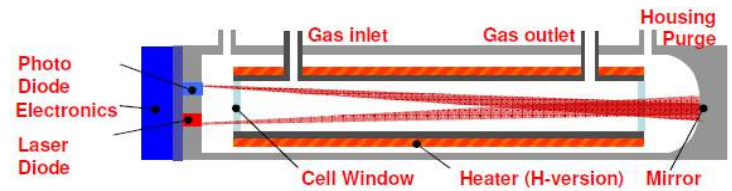

NH₃ steps 190degC, 20s Integration time at constant ambient temperature.

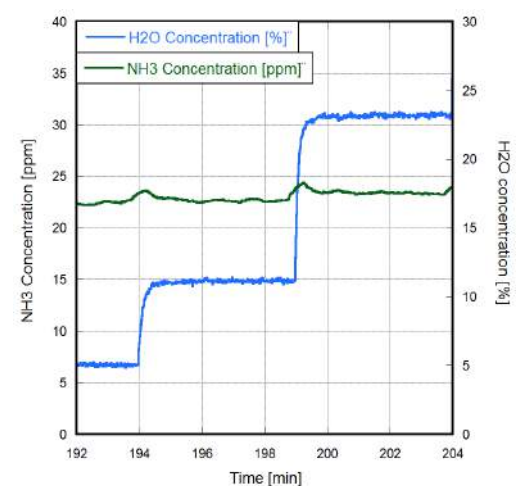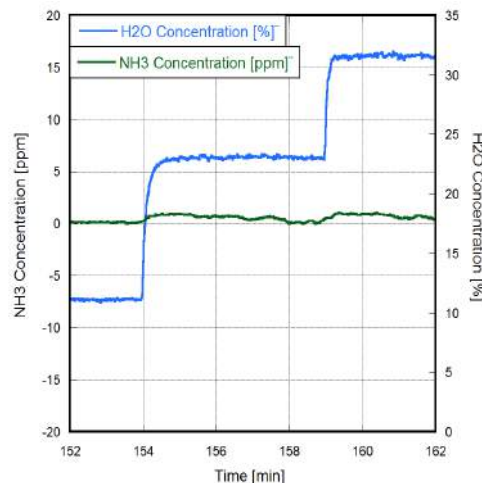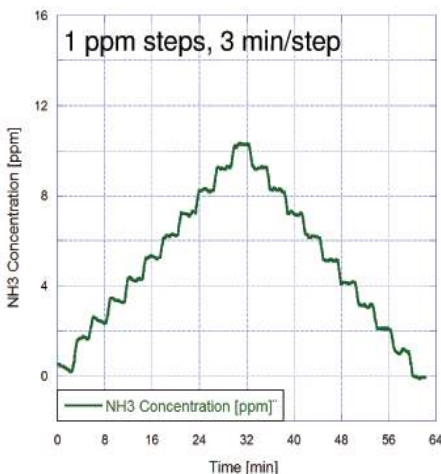

Airwell+7 Gas Analyzer Specification

1. Airwell+ 7 CH4 TDLAS Gas Analyzer

Application : Green House Gas, Livestock, Landfill Gas, Leak detection Fence line Air Monitoring, Bio-gas research Gas Emission		
Detection range	0-100 ppm	Max 40,000ppm
Lower Detection limit	0.3 ppm	
Display Resolution	0.1 ppm	
Sample flow rate	1.5 ~ 5 liter/min	at 10 s integration
Response time	2 sec	T=90%
Repeatability	<2 % of reading	



2. Airwell+ 7 NH3 TDLAS Gas Analyzer

Application : DeNox SCR, Green House Gas, Livestock, Landfill Gas, Leak detection, Refrigeration Storage, Odorants, Gas purity, Fence line Monitoring, Bio-gas research etc.. Gas Emission		
Detection range	0-100 ppm	Max 3,000ppm
Lower Detection limit	0.3 ppm	
Display Resolution	0.1 ppm	
Sample flow rate	1.5 ~ 5 liter/min	
Response time	2 sec	T=90%
Repeatability	<2 % of reading	

at 10 s integration



3. Airwell+ 7 HCL TDLAS Gas Analyzer

Application : Incinerator Gas Emission Leak detection , Gas Purity, Odorants Fence line Monitoring, Bio-gas research etc..		
Detection range	0-100 ppm	Max 500 ppm
Lower Detection limit	0.3 ppm	
Display Resolution	0.1 ppm	
Sample flow rate	1.5 ~ 5 liter/min	
Response time	2 sec	T=90%
Repeatability	<2 % of reading	

at 10 s integration



4. Airwell+7 NDIR Gas Analyzer (User Selectable)

Gas Components:	SF6 N2O Refrigerants C2H2 C2H4 C3H8 SO2 CO CO2 NO Gas Emission	
Detection range	10,100,1000 ppm ~ 100% User selectable	
Lower Detection limit	ppb or ppm, % (depends on the range)	
Display Resolution	ppb or ppm	
Sample flow rate	1.5 ~ 5 liter/min	
Response time	10sec	T=90%
Repeatability	<2 % of reading	

If you want to measure the other gas component, please contact our technical support team



* Airwell + is Trade mark and all system program registered.
KINSCO has all these rights.

Remote Control & data transfer through the Internet to Mobile Unit



Optional System : 6 Multi-point Sampling System with Airwell+7



Sample Control System Model SCS

**** Our suggestion -You can save the money !**

If you want to use your own sample sequence valve controller for the multipoint measurement with our Airwell+7 Gas analyzer, we can make the program of display to meet your need. Please contact us.

Airwell+7 General Specification

Display : High resolution : High resolution 7 inches Color Touch screen display

Operational power : 220VAC 50/60 Hz

Data Memory : over 4 Giga Byte

2 USB ports for the data collection and External keyboard/Mouse

Built-in sampling pump : Sample flowrate 1~5 liter/min

* Internet Mobile connection for the Data Transmission & System Control

Operating System Max memory 4GB, DDR3 CPU Linux OS
Slot 2, Intel chipset, High speed USB 3.0,
Graphic (On-board VGA D-SUB) Giga byte LAN

Operation condition of detection unit

- Important : Reference conditions, external: 20°C – 23°C, 920 -1020 hPa, 40 to 50% r.H.

Principle of detection - CH₄ NH₃ CO₂ Tunable Diode Laser Spectrometry (TDLS)

Wavelength (μm) : CH₄: 1.6 NH₃: 1.5 CO₂: 3 HCL: 1.8

Accuracy : ± 2% of reading or, ± 2 ppm whichever is larger

Zero drift : over 2 h period - 2% reading

Span drift : over 8 h period - within Accuracy

Max. error on temp. comp of reading/°C : < 0.1 %

Linearity - included in the accuracy

Cross talk/interference - Gas matrix and application dependent

Displayed resolution : 0.1 ppm (negative values can also be displayed)

Ambient temp. compensate : Type A : CH₄ : -30~60 °C, NH₃ & CO₂ : -20~60°C

Type H : NH₃ : -20 ~55°C

* A: For Ambient temperature sample H: For Hot Gas sample 190 C

Meas. gas max. humidity abs. H₂O % application dependent, needs calibration

Weight : about 10 kg, Case material : Anodized white aluminium

Dimension : 19 Inches Rack mountable / Table Top Depth 600 (mm)

- Options :
1. Temperature, Humidity or Flow sensor
 2. 6 points Sample Control System
 3. Other Gas sensing & Parameter (Please consult)

Save your energy, time & cost !

Expandable Application.

- Long distance sampling
- Time interval sample test
- Wide area gas sampling
- Up & down stream test
- Multi-Sample Test & Research

Control by the Airwell +7 or PC

Built-in : Test Gas port, 6 Inputs(option)

LED Status Signal, Main flowmeter

Can be connect with other Analyzer
(Please consult.)

Point	CH ₄	NH ₃	CO ₂	Flow _(m3/h)	°C	On
No1	3.1 ppm	15.1 ppm	2.7 %	1.60	0.0	●
No2	3.2 ppm	15.1 ppm	2.8 %	1.61	0.0	●
No3	3.2 ppm	15.0 ppm	2.7 %	0.79	0.0	●
No4	2.6 ppm	13.7 ppm	3.3 %	0.42	0.0	●
No5	0.0 ppm	0.0 ppm	0.0 %	1.39	0.0	●
No6	0.8 ppm	0.7 ppm	0.0 %	0.94	0.0	●

Nothing unusual.

MAIN SAVE



KINSCO Technology Co.,Ltd (주)한국산업기기

Suyu Ro 62, Kangbuk-Gu, Seoul Korea 142-891

tel) +82(02)9089667 fax) +82(02)9029667 email) kinsco@empal.com

http://www.kinsco.co.kr

